

ROBBINS®



PHOTO: Spring Shade, White Oak, AWEK274W



Real American Hardwood with
Unparalleled Dent Resistance.

A beautiful home has always come second
to a home filled with life, love and dogs.
But it doesn't have to anymore.

A revolutionary breakthrough in hardwood flooring.
ArmorWood densified wood is a 100% natural product
created using a 100% natural process. By harnessing the basic
properties of heat and pressure, densified wood achieves
extraordinary results as pure as nature.

This is more than a new product, it's a whole new category of
flooring. What takes nature millions of years to do, we can do in a
matter of minutes, transforming real hardwood into even harder
wood. In this regard, densified wood truly stands alone as the first
of its kind.

The ArmorWood Advantage

Our patented technology uses heat and pressure to create a
revolutionary hardwood floor that's **100% real hardwood while**
being 6X more dent resistant and 4X more scratch resistant than
typical hardwood.



MADE IN THE USA
with U.S. and Global Components.



Scan to learn more
about ArmorWood



Inhibits the
Growth of Bacteria



100% Real
Hardwood



6X More
Dent Resistance



4X More
Scratch Resistance



Waterproof*

*See warranty for details.




ROBBINS®

The ArmorWood Difference

Scratch and dent damage caused by dogs is a leading reason why homeowners think they can't have hardwood floors. Not anymore, ArmorWood densified wood lets you enjoy real hardwood floors that are completely worry free!

#1 IN DENT RESISTANCE

When tested for indentation resistance by ASTM D2394, a 2" weighted metal ball is dropped from a 60" height and indent impact levels are measured - ArmorWood performed best!

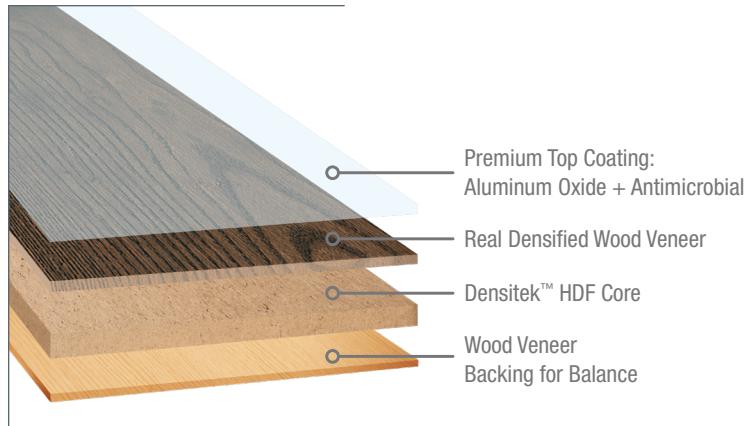


DOG SCRATCH TEST

ArmorWood has equivalent performance as SPC and Laminate along with being superior to Traditional Solid and Traditional Engineered Wood.



ARMORWOOD – THE TOUGHEST FLOOR EVER MADE!

Our patent pending process uses simply heat and pressure to close the open cells in hardwood and desifies the wood making it the hardest flooring on the market.

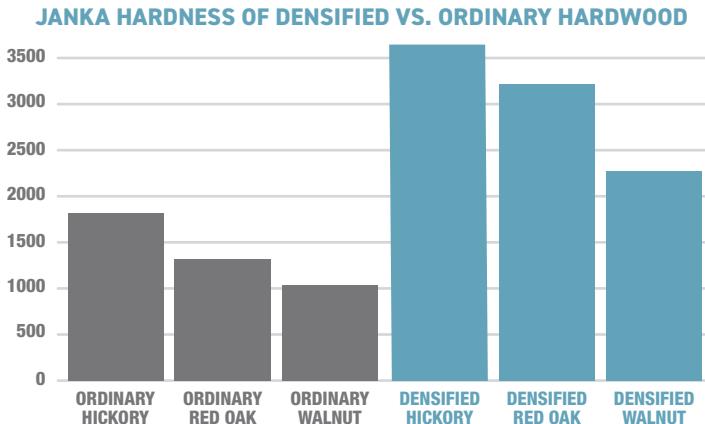

RAW MATERIAL WALNUT - 4.5 MM WITH 2" BALL DROP AT 60° - SEVERE DAMAGE FROM BALL

**DENSIFIED WALNUT - 3.0 MM
WITH 2" BALL DROP AT 60"
- NO NOTICEABLE DAMAGE
FROM BALL**



ROBBINS®



Serene Moment
7-1/2" AWEK254W



Spring Shade
7-1/2" AWEK274W



Natural
7-1/2" AWEK204W



Field And Forest
7-1/2" AWEK284W



Saddle
7-1/2" AWEK224W



After Dusk
7-1/2" AWEK244W



Woodsy Character
7-1/2" AWEK289W

ARMORWOOD ENGINEERED							
SPECIES	White Oak, Red Oak	THICKNESS	1/2"	FACE VENEER	1.5 mm - Sliced	TEXTURE	Wire-Brushed
WIDTH	7-1/2"	GLOSS	Low	FINISH	Urethane		
EDGE DETAIL	Micro-beveled edges and ends			LENGTH	60" max, 10" min		
INSTALLATION	Glue, Float, Staple with Glue Assist* Below / On / Above Ground Level			WARRANTY	Lifetime Limited Residential and 10-Year Limited Commercial		
CARTONS PER PALLET	25	SQ FT PER CARTON	29.5	SQ FT PER PALLET	737.5	PALLETS PER TRUCK/CONTAINER	23

	QUARTER ROUND	T-MOLDING	REDUCER STRIP	THRESHOLD	STAIRNOSE
Natural	TQSWOSP3050	TMSWOSP3055	TR5WK966LW	THSWOSP3055	TS5WK966LW
Saddle	TQ0WK952L	TM0WK952L	TR5WK952L	TH0WK952L	TS5WK952L
After Dusk	TQ0WK969LW	TM0WK969LW	TR5WK969LW	TH0WK969LW	TS5WK969LW
Serene Moment	TQ0WK970LW	TM0WK970LW	TR5WK970LW	TH0WK970LW	TS5WK970LW
Spring Shade	TQ0WK533LW	TM0WK533LW	TR5WK533LW	TH0WK533LW	TS5WK533LW
Field & Forest	TQ0WK972LW	TM0WK972LW	TR5WK972LW	TH0WK972LW	TS5WK972LW
Woodsy Character	TQ0RK973LW	TM0RK973LW	TR5RK973LW	TH0RK973LW	TS5RK973LW